

Fixed input voltage, Isolated & Unregulated dual output

FEATURES

- International standard SIP encapsulation
- Isolation voltage 1500 VDC
- Sustainable short-circuit protection
- Low no-load input current
- Conversion efficiency up to 85%
- Working temperature range:- 40~+105°C



D1-A_S series is a single in line international standard package, mainly used in pure digital circuits, low-frequency analog circuits, relay driver circuits, data exchange circuits, etc.

SELECTION TABLE

model	Input voltage(VDC)		output voltage (VDC)	output current		efficiency (%)	capacitive load (uF)
	Typ	range		Min (mA)	Max(mA)		
D1-A0303S	3.3	3.0~3.6	±3.3	±15	±152	80	1200
D1-A0305S			±5	±10	±100	82	1200
D1-A0309S			±9	±6	±56	85	470
D1-A0312S			±12	±5	±42	83	220
D1-A0315S			±15	±4	±34	82	220
D1-A0324S			±24	±2	±21	84	100
D1-A0503S			5	4.5~5.5	±3.3	±15	±152
D1-A0505S	±5	±10			±100	82	1200
D1-A0509S	±9	±6			±56	85	470
D1-A0512S	±12	±5			±42	83	220
D1-A0515S	±15	±4			±34	82	220
D1-A0524S	±24	±3			±21	84	100
D1-A1203S	12	10.8~13.2			±3.3	±15	±152
D1-A1205S			±5	±10	±100	82	1200
D1-A1209S			±9	±5	±56	85	470
D1-A1212S			±12	±5	±42	83	220
D1-A1215S			±15	±4	±34	82	220
D1-A1224S			±24	±3	±21	84	100
D1-A1503S			15	13.5~16.5	±3.3	±15	±152
D1-A1505S	±5	±10			±100	81	1200
D1-A1509S	±9	±5			±56	85	470
D1-A1512S	±12	±5			±42	83	220
D1-A1515S	±15	±4			±34	82	220
D1-A1524S	±24	±2			±21	84	100
D1-A2403S	24	21.6~26.4			±3.3	±15	±152
D1-A2405S			±5	±10	±100	81	1200
D1-A2409S			±9	±5	±56	83	470
D1-A2412S			±12	±5	±42	82	220
D1-A2415S			±15	±4	±34	81	220
D1-A2424S			±24	±3	±21	82	100

INPUT

parameter	conditions/description		min	Typ	Max	units
Input Current (Full Load/No Load)	3.3VDC input	3.3VDC Output	/	384/10	405/--	mA
		Other Outputs	/	370/18	389/--	
	5VDC input	3.3VDC Output	/	270/8	286/--	
		Other Outputs	/	240/12	254/--	
	12VDC input	3.3VDC Output	/	112/8	118/--	
	15VDC input	3.3VDC Output	/	84/8	88/--	
24VDC input	3.3VDC Output	/	56/8	60/--		
Refracted ripple current			/	15	/	
surge voltage	for maximum of 1 second	3.3VDC input models	-0.7	/	5	VDC
		5VDC input models	-0.7	/	9	
		12VDC input models	-0.7	/	18	
		15VDC input models	-0.7	/	21	
		24VDC input models	-0.7	/	30	
Input filter	capacitance filter					
Hot Plug	Unavailable					

OUTPUT

parameter	conditions/description		Min	Typ	Max	units	
Voltage accuracy	10% load to 100% load change		Refer to Output Error Envelope Curve Figure 2				
line regulation	Full load, input voltage variation ±1%	3.3V output	/	/	±1.5		
		Other output	/	/	±1.2		
load regulation	10% to 100% load change	3.3VDC input	3.3V output	/	12	18	%
			Other output	/	8	15	
		5VDC input	3.3V output	/	15	20	
			5V output	/	10	15	
	12/15/24VDC input	3.3V output	3.3V output	/	8	20	
			5V output	/	5	15	
		Other output	3.3V output	/	8	20	
			5V output	/	5	15	
Ripple and noise ¹	20MHz bandwidth (peak to peak)		/	80	/	mVp-p	
Temperature coefficient	100% load		/	±0.02	/	%/°C	
Short circuit protection	Continuous, self-recovery						

Notes: 1. ripple and noise are measured at 20 MHz BW by "parallel cable" method with 1 µF ceramic and 10 µF electrolytic capacitors on the output.

COMPREHENSIVE


parameter	conditions/description	Min	Typ	Max	units
Isolation voltage	input to output for 1 minute at 1 mA max.	1500	/	/	VDC
Isolation resistance	Input to output, insulation voltage 500 VDC	1000	/	/	MΩ
Isolation capacitor	Input-Output, 100 kHz/0.1 V	/	20	/	pF
Operating temperature	Use at reduced temperature ≥ 85°C. See the derating curve in Figure 1.	-40	/	105	
Storage temperature		-55	/	125	°C
Working temperature rise	at full load, Ta=25°C	/	25	/	
Welding Temperature	Manual-welding, Operation time 3-5 seconds	/	/	300	
	Wave soldering, Operation time 5-10 seconds	/	/	260	
Storage Humidity	non-condensing	/	/	95	%
Switching frequency	Nominal input voltage	/	260	/	kHZ
MTBF	MIL-HDBK-217F @ 25°C	3500	/	/	Khours
Cooling method	Natural air cooling				
Dimensions	19.65 x 6.00 x 10.16mm (0.774 x 0.236 x 0.40 inch)				
Weight	2.1g				
Case material	Black plastic; flame-retardant and heat-resistant plastic (UL94-V0)				

EMC


	parameter	conditions/description
Emissions	CE	CISPR32/EN55032 CLASS B (see Fig. 2 for recommended circuit)
	RE	CISPR32/EN55032 CLASS B (see Fig. 2 for recommended circuit)
Immunity	ESD	EC/EN61000-4-2 Air ±8kV, Contact ±6kV perf. Criteria B

Note: For EMC characteristic test circuits, see (Figure 4).

Product characteristic curve

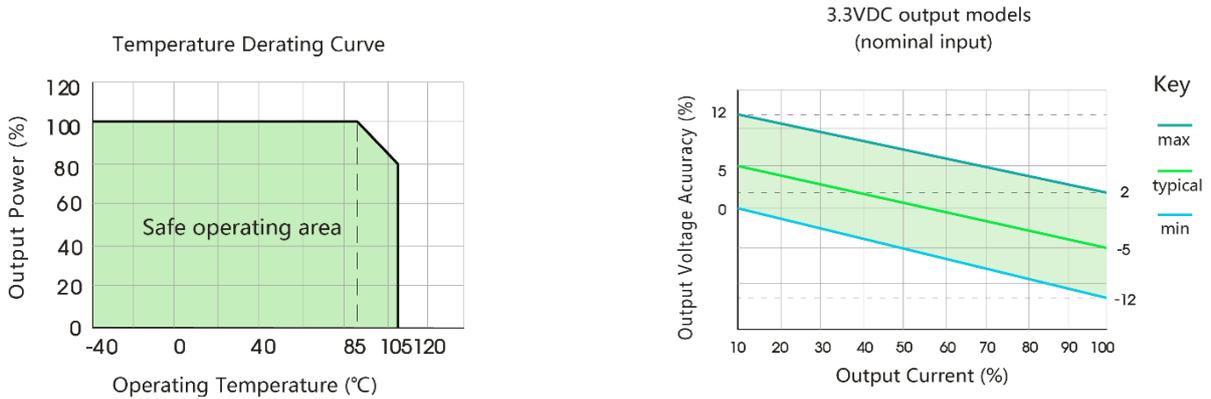

(Figure 1) Temperature curve

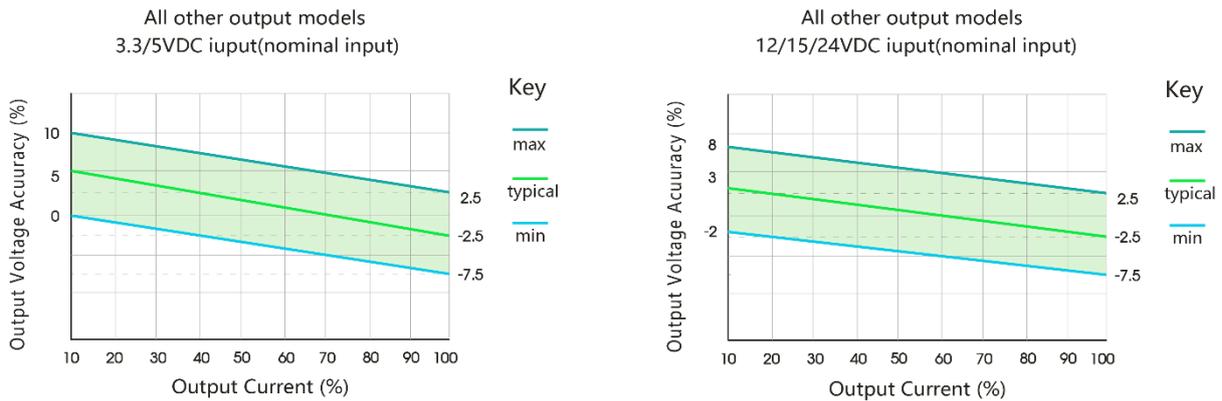

(Figure 2) Error envelope curve

Design reference

1. General typical application circuits (as shown in the following figure)

If further reduction of input and output ripple is required, a filtering network can be connected at the input and output terminals, as shown in Figure 2. Choose a suitable filtering capacitor. If the capacitor is too large, it may cause startup problems. Under the condition of ensuring safe and reliable operation, the reference capacitance value is recommended in the table on the right. For applications with actual output power less than 0.5W, it is recommended not to connect external capacitors.

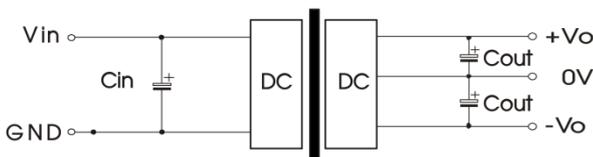


Figure 1

Input voltage (Vdc)	Capacitance Cin	Output voltage (Vdc)	Capacitance Cout
3.3	10uF/16V	±3.3/±5	10uF/16V
3.3	/	±9/±12	2.2uF/25V
	/	±15/±24	1uF/50V
	/	±3.3/±5	4.7uF/16V
5	4.7uF/16V	±3.3/±5	4.7uF/16V
其它	12	±9/±12	1uF/16V
	15	±15	0.47uF/25V
	24	±24	0.47uF/50V
	24	1uF/50V	±24

Table 1

2. EMC Recommended Application Circuits (For parameter details, see Table 2)



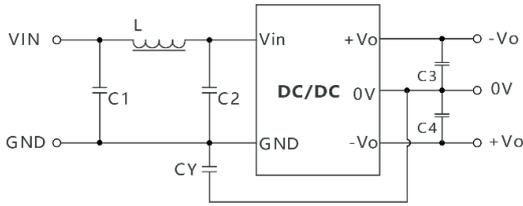


Figure 2

Input voltage (VDC)	3.3	5	Others		
Output voltage (VDC)	3/5	9/12/15/24	3.3/5/9	12/15/24	/
C1/C2	4.7μF/16V	4.7μF/25V	4.7μF/25V	4.7μF/50V	4.7μF/50V
CY	/	270pF/2kV	100pF/2kV	1nF/2kV	270pF/2kV
C3/4	Refer to Table 1 for Cout parameters				
L	6.8μH				

Table 2

MECHANICAL DRAWING

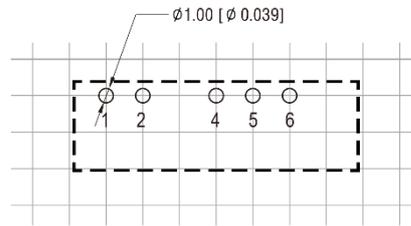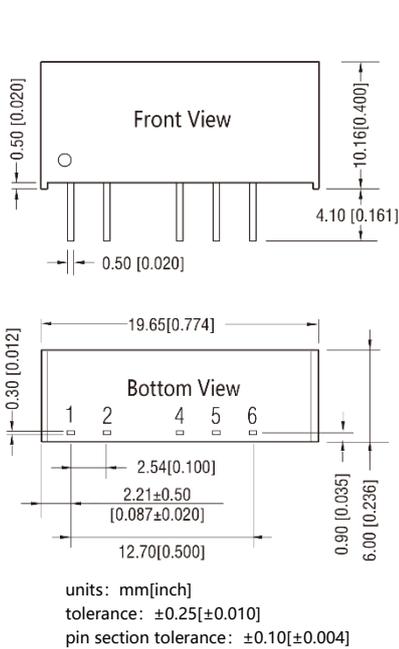

Recommended PCB packaging pin positions (top view)

PIN CONNECTIONS	
PIN	Function
1	GND
2	Vin
3	0V
4	+Vo

- Note:
1. Qituo technology reserves the right to change the product at any time without notice;
 2. The product shall be provided with a 3-year warranty period;
 3. Unless otherwise specified, the products in this manual are not authorized to be used for key components of equipment requiring high reliability, so as not to affect the safety or effectiveness of the device;
 4. All parameters in this manual are measured under indoor $t_a=25\text{ }^\circ\text{C}$, humidity <75%, nominal input voltage and output rated load;