

2: 1 Wide voltage input, isolated, regulated dual output, DIP package

FEATURES

- Wide voltage input of 2:1
- Isolation voltage: 1500 VDC
- Sustainable short-circuit protection
- High conversion efficiency
- Operating temperature range: -40 to +85°C
- Complies with EN62368 certification standard



V06-A_Y series is an international standard through-hole DIP package, mainly used for: Industrial control circuits, power electronics, instrumentation, communication circuits, etc.

SELECTION TABLE

Part No	Input voltage(VDC)		Output voltage (VDC)	Output current		Efficiency (%)	Capacitive load (uF)
	Typ	Range		Min (mA)	Max(mA)		
V06-A1205Y	12	9~18	±5	0	±600	78	1000
V06-A1212Y			±12	0	±250	84	470
V06-A1215Y			±15	0	±200	84	220
V06-A1224Y			±24	0	±125	84	100
V06-A2405Y	24	18~36	±5	0	±600	78	1000
V06-A2412Y			±12	0	±250	84	470
V06-A2415Y			±15	0	±200	84	220
V06-A2424Y			±24	0	±125	84	100
V06-A4805Y	48	36~75	±5	0	±600	78	1000
V06-A4812Y			±12	0	±250	84	470
V06-A4815Y			±15	0	±200	84	220
V06-A4824Y			±24	0	±125	84	100

INPUT

Item	Conditions/Description		Min	Typ	Max	Units
Input Current	Full Load/No Load	12VDC input	/	615/10	640/25	mA
		24VDC input	/	290/7	320/15	
		48VDC input	/	145/7	160/10	
Refracted ripple current			/	20	/	
Surge voltage	Maximum 1 second	12VDC input	-0.7	/	25	VDC
		24VDC input	-0.7	/	50	
		48VDC input	-0.7	/	100	
Input filter type	Capacitance filter					
Hot Plug	Not supported					

OUTPUT

Item	Conditions/Description	Min	Typ	Max	Units
Output voltage accuracy	Load change from 5% to 100%	/	±1	±3	
Line regulation	Full load, input voltage variation ±1%	/	±0.2	±1	%
Load regulation	Load change from 5% to 100%	/	±0.5	±1.5	
Transient recovery time	25% load step change	/	0.3	0.5	ms
Transient response deviation		/	±3	±8	%
Ripple and noise ¹	20MHz bandwidth (peak to peak)	/	70	/	mVp-p
Temperature coefficient	100% load	/	±0.03	/	%/°C
Output overvoltage protection		110	/	160	%Vo
Output overcurrent protection	Input voltage range	110	140	190	%Io
Short circuit protection		Continuous, self-recovery			

Notes:

1. ripple and noise are measured at 20 MHz BW by "parallel cable" method with 1 μF ceramic and 10 μF electrolytic capacitors on the output.

COMPREHENSIVE


Item	Conditions/Description	Min	Typ	Max	Units
Isolation voltage	input to output for 1 minute at 1 mA max.	1500	/	/	VDC
Isolation resistance	Input to output, insulation voltage 500 VDC	1000	/	/	MΩ
Isolation capacitor	Input-Output, 100kHz/0.1V	/	1000	/	pF
Operating temperature	Use with derating when temperature is ≥71°C, see derating curve chart 1	-40	/	85	
Storage temperature		-40	/	125	°C
Working shell temperature rise	at full load, Ta=25°C	/	25	/	
Welding Temperature	Manual-welding, Operation time 3-5 seconds	/	/	300	
	Wave soldering, Operation time 5-10 seconds	/	/	260	
Storage humidity	non-condensing	5	/	95	%
Switching frequency	Full load, input nominal voltage	/	300	/	KHz
MTBF	MIL-HDBK-217F @ 25°C	/	1000	/	Khours
Cooling method	Natural air cooling				
Dimensions	25.40 x 25.40 x 11.70mm (1.000 x 1.000 x 0.461 inch)				
Weight	12.5g (Typ.)				
Case material	Aluminum alloy				

EMC

Item	Conditions/Description	
EMI	CE	CISPR32/EN55032 CLASS B (For recommended circuits, see Figure 3-②)
	RE	CISPR32/EN55032 CLASS B (For recommended circuits, see Figure 3-②)
EMS	Electrostatic Discharge	IEC/EN61000-4-2 Contact ±4kV perf. Criteria B
	Radiated Immunity	IEC/EN61000-4-3 10V/m perf. Criteria A
	Pulse group Immunity	IEC/EN61000-4-4 ±2kV(For recommended circuits, see Figure 3-①) perf. Criteria B
	Surge Immunity	IEC/EN61000-4-5 line to line ±2kV (For recommended circuits, see Figure 3-①) perf. Criteria B
	Conducted disturbance immunity	IEC/EN61000-4-6 3 Vr.m.s perf. Criteria A
	Voltage dips, and short-term interruptions immunity	IEC/EN61000-4-29 0%-70% perf. Criteria B

Product characteristic curve

(Figure 1) Temperature curve

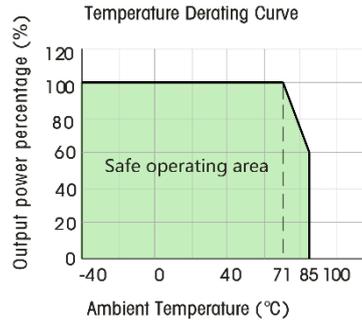


Design reference

1. General application circuits

All DC/DC converters in this series are tested according to the generally recommended circuit (as shown in Figure 2) before leaving the factory.

If further reduction of input and output ripple is required, the external filter capacitors C_{in} and C_{out} connected to the input and output terminals can be appropriately increased in capacitance, but the capacitance value should not exceed the maximum capacitive load of the product, otherwise it may cause startup issues. Under the condition of ensuring safe and reliable operation, the recommended capacitance values are as follows (Table 1). For applications with actual output power less than 0.5W, it is recommended not to connect external capacitors.

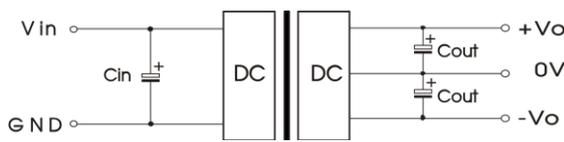


(Figure 2)

Input voltag(Vdc)	Capacitance C_{in}	Output voltag(Vdc)	Capacitance C_{out}
12	100uF/25V	±5	10uF/16V
24	10-47uF/50V	±12/±15	10uF/25V
48	100uF/100V	±24	10uF/50V

(Table 1)

2. EMC Recommended Application Circuits (Parameters are shown in Table 2)

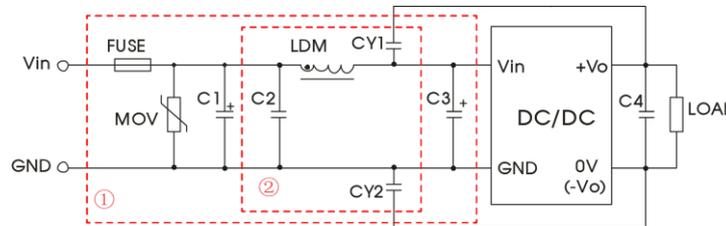

(Figure 3)EMC Recommended Circuit

$V_{in}(VDC)$	12	24	48
FUSE	Slow-blow fuse, selected based on the user's actual input current		
MOV	14D330K	14D470K	14D101K
C1	1000μF/35V	1000μF/50V	330μF/100V
C2	1μF/50V	1μF/50V	4.7μF/100V
C3	330μF/35V	330μF/50	330μF/100V
C4	Refer to the C_{out} parameter in Figure 2		
LDM	4.7μH		
CY1,CY2	1nF/400VAC		

(Table 2) Recommended Application Circuit Parameters of EMC

Note:

- Part ① in Figure 3 is used for EMS testing; part ② is used for EMI filtering, which can be selected according to requirements;
- If the component in the diagram does not have parameter descriptions attached, this component is not required in the peripheral circuit of this model.

